

## TECHNICAL SPECIFICATIONS

### PN: ANCHOR24PLATE

#### 24" Roof Tieback w/Baseplate

24" Roof Tieback w/Baseplate Galvanized Finish, 5/8" Thick Baseplate, 5,000 Lb. MBS, Fixed Connection Point for Single Point Tie-off or HLL Endpoint. Meets or Exceeds OSHA 1910 and 1926 Subpart M, ANSI Z359.18-2017 and ANSI A10.32-2012.

### PN: ANCHOR24POST


#### 24" Roof Tieback Post

24" Roof Tieback Post Galvanized Finish, Post Only for Weld On Installation, 5,000 Lb. MBS, Fixed Connection Point for Single Point Tie-off or HLL Endpoint. Meets or Exceeds OSHA 1910 and 1926 Subpart M, ANSI Z359.18-2017 and ANSI A10.32-2012.

### PN: ANCHOR24BACKER

#### 18" or 24" Roof Anchor Back Plate

Back Plate for 18" or 24" Roof Anchor Galvanized Steel Backer Plate 5/8" Thick. For Mounting 18" or 24" Roof Anchor to Beams or Other Structural Member.

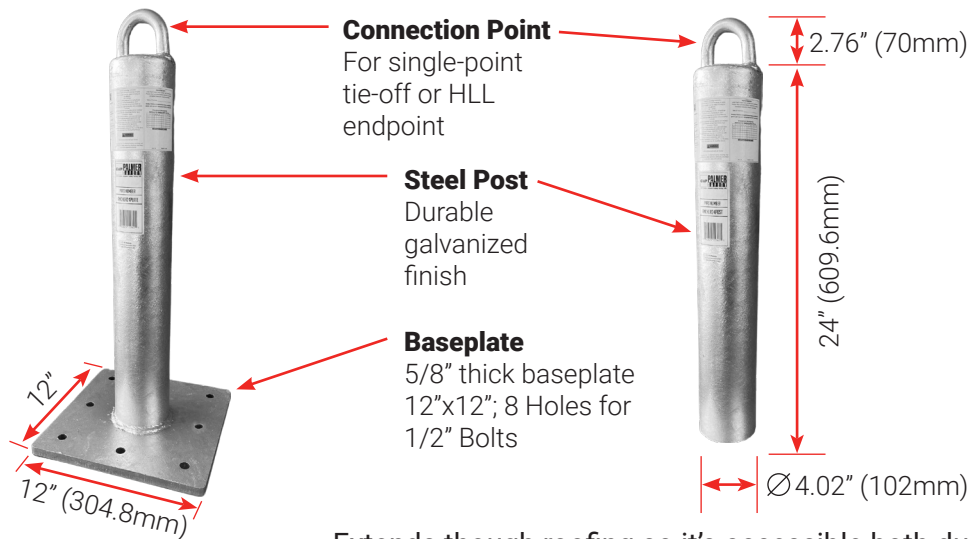

**Back Plate**  
 Allows install on I-beams or other structural member



**DESIGN:**

- Extends through roofing so it's accessible both during and after construction
- Intended for permanent locations
- Compatible with horizontal lifelines
- Compatible for installations onto concrete substrates and structural metal beams (with backing plate)

**STANDARDS:** OSHA 1926 Subpart M & 1910 and ANSI Z359.18-2017 & A10.32 -2012 Type A & Type T Anchorage Connector

**MATERIALS:** Galvanized Steel

**WORKER CAPACITY:** 130 - 420 lbs.

**PERFORMANCE:**

- Maximum Users: 1
- 5,000 lb. MBS (Minimum Breaking Strength)

**NOTES:**

- Minimum service temperature: -30°F
- Suitable for use in combination with HLL Systems