


## TECHNICAL SPECIFICATIONS

### 2-Hole Anchor Plate with D-Ring

With a stainless-steel baseplate, the 2-Hole Anchor Plate with D-Ring can be secured to steel or concrete surfaces by bolting, welding, or using suitable fasteners. It is ideal for permanent installations and those exposed to the elements. The large D-ring is freely movable with gloved hands. Minimum breaking strength is 5000 lbs. Meets or Exceeds OSHA 1926 Subpart M, OSHA 1910, ANSI Z359.18-2017, and ANSI A10.32-2012 Type A Anchorage Connector.

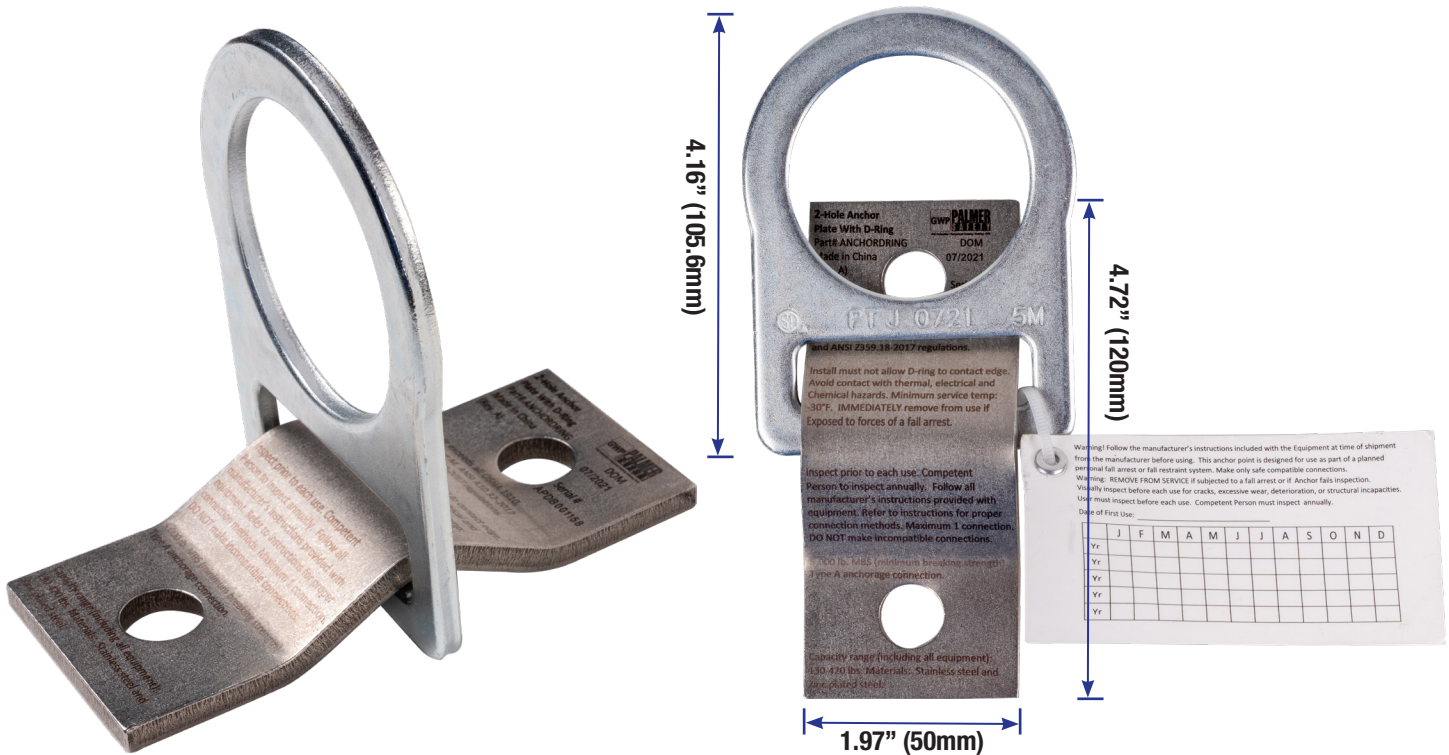

**CAPACITY:** Maximum 1 connection per anchor  
 Worker Weight Range: 130 – 420 lbs. including all tools and equipment

- DESIGN:**
- Stainless steel baseplate resists corrosion
  - Small footprint: 1.97" x 4.72"
  - Compatible with horizontal lifelines

**MATERIAL:** Stainless Steel and Zinc-plated Steel

**MINIMUM PERMITTED SERVICE TEMPERATURE:** -30° F

**MINIMUM BREAKING STRENGTH:** 5000 lbs.

**CONFORM TO NORM:** Meets or Exceeds OSHA 1926 Subpart M, OSHA 1910, ANSI Z359.18-2017, and ANSI A10.32-2012 Type A Anchorage Connector