

PN: L711213




• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808
Fax: (504) 733-2996
PalmerSafetyUS.com

TECHNICAL SPECIFICATIONS

6 ft. Leading Edge Double Leg Cable Lanyard

Foot level or head level Tie-back leading edge double leg shock absorbing lanyard with two forged snap hook. With 7X19 aircraft steel cable, red vinyl coated. Lifeline cable tested on a 0.005 radius sharpened steel edge (Z359.14-2012). Meets or exceeds ANSI Z359.13-2013.

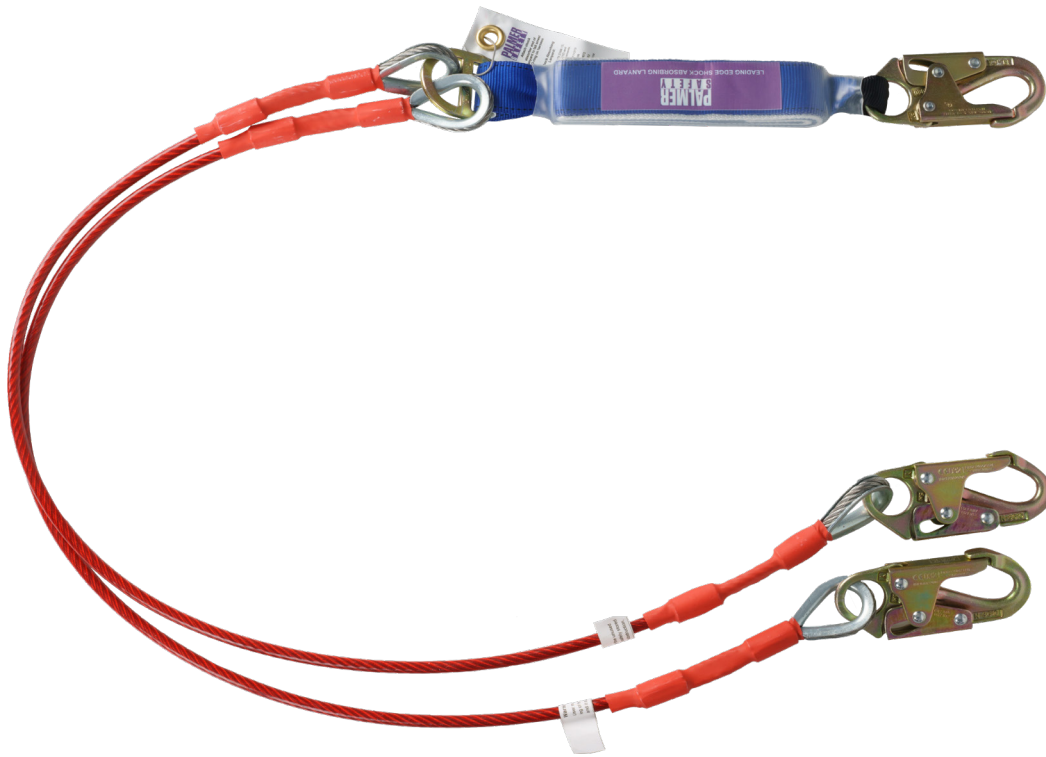

- DESIGN:**
- Snap hooks at the ends
 - Double-leg design facilitates 100% tie-off

MATERIAL: Polyester webbing, alloy steel hook, vinyl coated 1/4" 7X19 cable

LENGTH: 6 ft.

6 FT. FREE FALL: Max Arrest Force: 1800 lbs.; Average Arrest Force: 900 lbs.; Arrest Distance: 48"

12 FT. FREE FALL: Max Arrest Force: 1800 lbs.; Average Arrest Force: 1350 lbs.; Arrest Distance: 60"

CONFORMS TO: Meets or Exceeds ANSI Z359.13-2013, OSHA 1926.502 and 1910.66