

PN: L712113




• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808  
Fax: (504) 733-2996  
PalmerSafetyUS.com

## TECHNICAL SPECIFICATIONS

### 6 ft. Leading Edge Single Leg Cable Lanyard with Rebar Hook

Foot level or head level Tie-back leading edge single leg shock absorbing lanyard with one forged snap hook with one rebar hook. With 7X19 aircraft steel cable, red vinyl coated. Lifeline cable tested on a 0.005 radius sharpened steel edge (Z359.14-2012). Meets or exceeds ANSI Z359.13-2013.

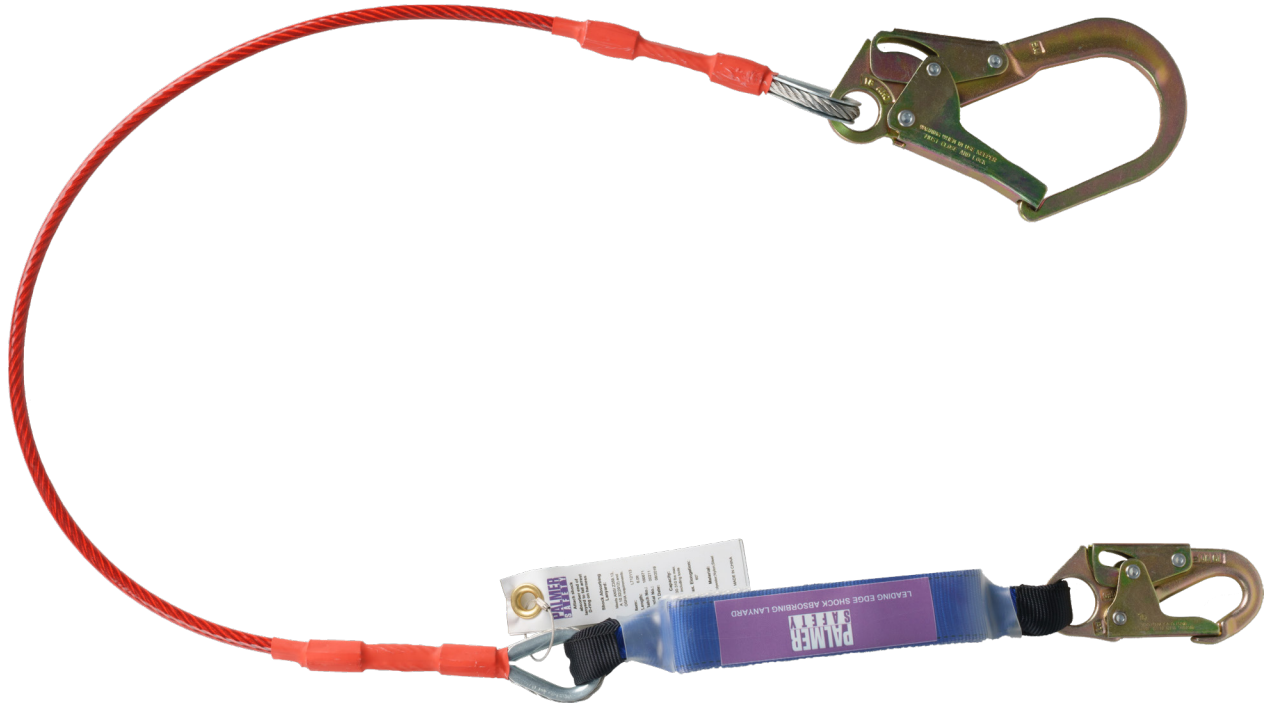

**DESIGN:** • Rebar hook at the end

---

**MATERIAL:** Polyester webbing, alloy steel hook, vinyl coated 1/4" 7X19 cable

---

**LENGTH:** 6 ft.

---

**6 FT. FREE FALL:** Max Arrest Force: 1800 lbs.; Average Arrest Force: 900 lbs.; Arrest Distance: 48"

---

**12 FT. FREE FALL:** Max Arrest Force: 1800 lbs.; Average Arrest Force: 1350 lbs.; Arrest Distance: 60"

---

**CONFORMS TO:** Meets or Exceeds ANSI Z359.13-2013, OSHA 1926.502 and 1910.66