


## TECHNICAL SPECIFICATIONS


### Dual SRL LE 9' Galvanized Cable with Steel Rebar Hook and SRL170 Connector

SRD 9' Leading Edge Twin Galvanized Cable with Steel Rebar hook, 9' retractable galvanized cable, swivel top composite housing, 2-1/2" galvanized rebar hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

FRONT VIEW SRL1411222

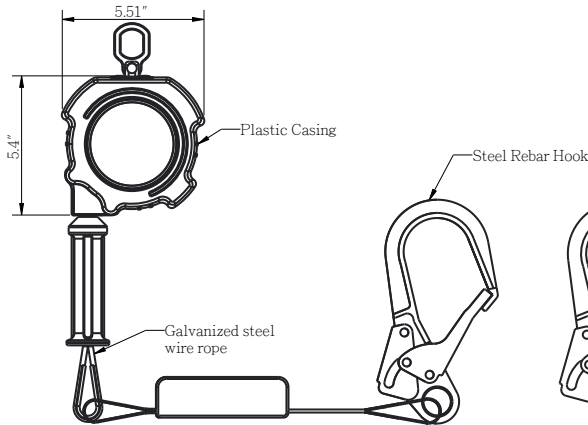

SIDE VIEW

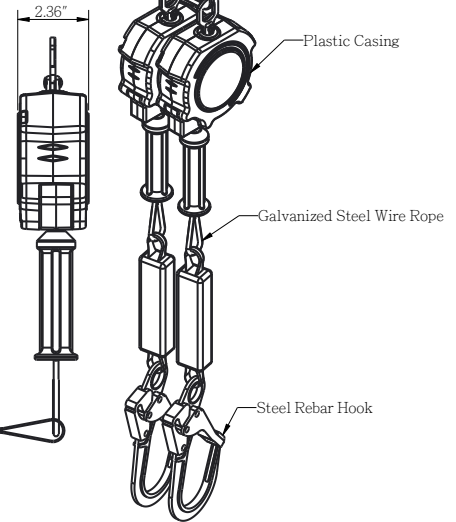

Meets or Exceeds ANSI Z359.14-2014 ClassB SRL-LE

**PHYSICAL PARAMETERS:**

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Stainless Steel and corrosion-resistant components.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 7/32".
- For sharp edge application.

**LENGTH:** 9 ft.

**CABLE:** Material: Galvanized steel wire rope diameter of 7/32"

**MINIMUM BREAKING STRENGTH:** 3300 lbs.

**NORM:** Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

**VITAL TEST COMPLIANCE:**

Static Strength: 3000 lbs. for 1 minute. Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.  
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

**WEIGHT:** 11.52 lbs. ± 0.02 lbs.

