


TECHNICAL SPECIFICATIONS

SRL LE 18' Galvanized Cable with Small Hook.

18' leading edge retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner. Black housing. Meets or exceeds ANSI Z359.14-2014 and ANSI Z359.14-2014 SRD-LE.

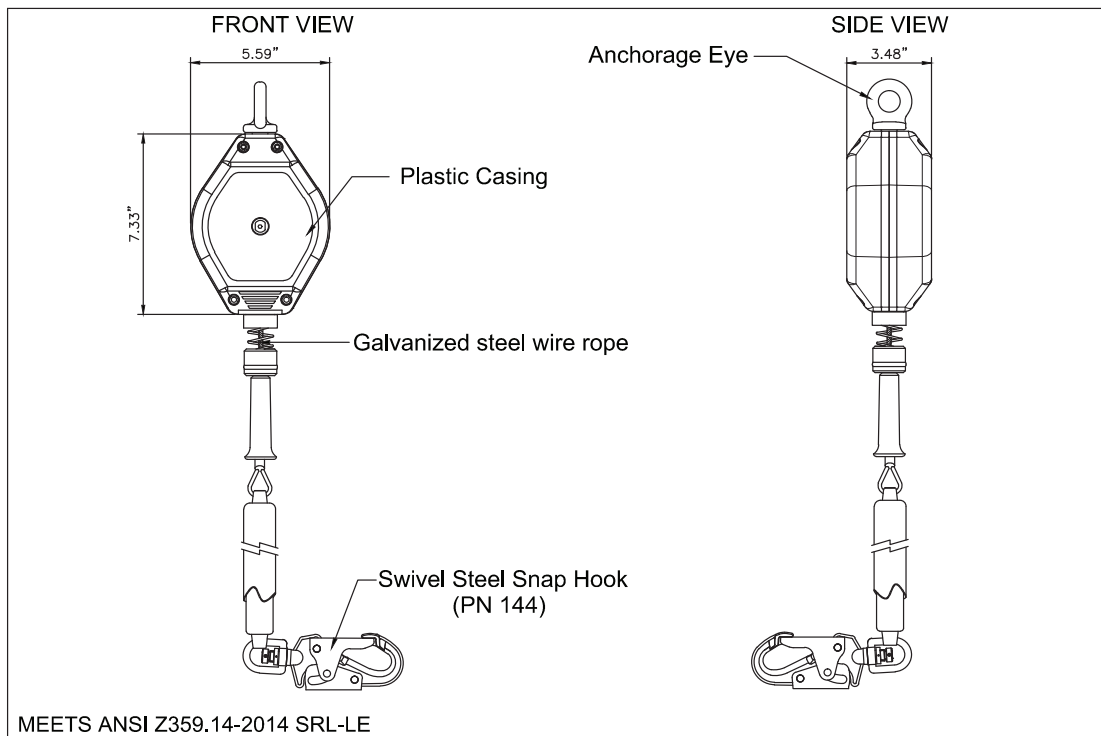

PHYSICAL PARAMETERS:

- Composite housing.
- Robust & durable plastic casing.
- Swivel anchorage eye.
- Swivel steel snap hook with load indicator at attachment end (PN 144 as per ANSI Z359.12-2009; gate strength 3600 lbs.).
- Galvanized steel wire rope (option of having S.S. wire rope available).
- Designed to be used where user needs to work near a potential leading edge.

LENGTH: 18'

CABLE: 3/16" GAC
 Material: Galvanized steel wire rope diameter of 7/32"
 Minimum Breaking Strength: 3800 lbs.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute.
 Dynamic Strength: 300 lbs. mass subjected in a leading edge having a radius of max 0.005" to a 5' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a 5' free fall on leading edge having max radius of 0.005". Braking force less than 840 lbs. Average braking force less than 291 lbs.

CONFORM TO THE NORM:

Meets or exceeds ANSI Z359.14-2014 SRD-LE

WEIGHT: 9.07 lbs. ± 0.11 lbs.